




2016 Crystal Clock Oscillator 2016XO Series

Model CX

4 PADS 2.0 x 1.6

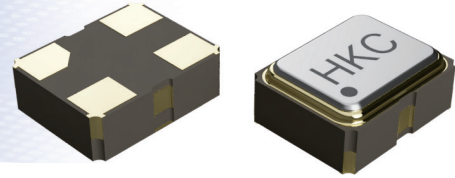

Frequency Range : 1.00MHz to 80.00MHz / 32.768KHz

Features :


- High reliability & low cost unit
- Tight stability & extended temperature available
- Lead-free type
- AEC-Q200 Stress Qualified Component

QUARTZ
CRYSTALS

Standard Specifications

Item	Value								
Frequency Range	1.00MHz to 80.00MHz / 32.768KHz								
Frequency Stability	±50ppm (or specify)								
Operating Temperature Range	-20°C to +70°C (or specify)								
Operable Temperature Range	-40°C to +85°C								
Operating Voltage	1.8V / 3.3V / 5.0V ±10%								
Output Type	HCMOS								
Output Load	15pF Max.								
Current Consumption (Max)	<table border="0"> <tr> <td>1.8V:</td> <td>3.3V</td> </tr> <tr> <td>1-16MHz: 5mA</td> <td>1-16MHz: 7mA</td> </tr> <tr> <td>17-80MHz: 15mA</td> <td>17-80MHz: 20mA</td> </tr> <tr> <td>32.768KHz: 0.2mA</td> <td>32.768KHz: 0.2mA</td> </tr> </table>	1.8V:	3.3V	1-16MHz: 5mA	1-16MHz: 7mA	17-80MHz: 15mA	17-80MHz: 20mA	32.768KHz: 0.2mA	32.768KHz: 0.2mA
1.8V:	3.3V								
1-16MHz: 5mA	1-16MHz: 7mA								
17-80MHz: 15mA	17-80MHz: 20mA								
32.768KHz: 0.2mA	32.768KHz: 0.2mA								
Output Symmetry	HCMOS: 40~60%(at 50%V _{DD}) ; 45~55% is available								
"High" Output Voltage	HCMOS: 90%V _{DD} Min.								
"Low" Output Voltage	HCMOS: 10%V _{DD} Max.								
Rise and Fall Time	1-80MHz: 7ns Max. 32.768KHz: 30ns Max.								
Tri-State	Yes								

Dimension

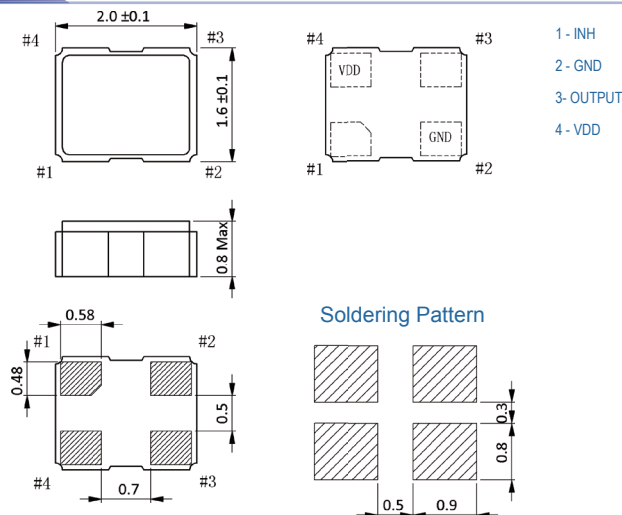

Note :

1. Manufacturer reserves the right to change the specification and content of this product for improvement without notification.
2. Custom specification is welcome. Please contact our sales representative for further details.
3. If the crystal is intended for applications which have direct impact on human life and properties, and require a high degree of reliability and safety concerns, customers must provide full information such as but not limit to the application, electrical and reliability specification at the inquiry beginning stage.
4. Customers have to agree to the "Guideline for handling crystal units" and "Standard Terms and Condition of Sales" which is printed this catalog before placing orders to our company or our distributors. There are also unpredictable factors such as applied condition, oscillation margin and etc and customers must check them beforehand. In case of queries, please do not fail to send inquiry to our company before ordering.

Ver 1.1

