

KStar100 GNSS Disciplined Oscillator

High Precision, Functional Flexible Oscillator



Holdover < $\pm 1.5\mu\text{s}$ over 24 hours

The KStar series GNSSDO is time and frequency synchronized to GNSS and provides a low noise 10MHz and a 1PPS outputs. It receives GNSS signals with a sensitivity of down to -167dBm. With a long-term frequency stability that shows deviations of less than $1\text{E}-12$. The new KStar achieves the quality standards of Stratum 2 of the Network Time Protocol and ITU-T Type II (G.812) of the International Telecommunication Union.

While temperature variation and aging of the core crystal impact the accuracy of traditional GNSSDOs when there is outage in GNSS-signal, the KStar GNSSDO is able to learn and compensate the influence of temperature and aging characteristics by the advanced AOM system modeling algorithm. As a result the holdover performance for the 1PPS output is better than $\pm 1.5\mu\text{s}$ accuracy over 24 hours under temperature variation of up to 20°C .

Key Features

- Support GPS, GLONASS, BeiDou & Galileo
- Better than $1\text{E}-12$ long term frequency stability
- Holdover of less than $\pm 1.5\mu\text{s}$ over 24 hours at 20°C temperature variations
- Fast frequency locking time as Stratum 2 clock source
- Multiple outputs
- USB / Ethernet interface

Applications

- Stratum 2 (Type II) Clock Source
- WiMAX/LTE Mobile Base Station
- 5G/4G LTE-TDD and LTE-FDD
- Precision Time Base Reference
- General Timing and Synchronization



+852 - 3511 2388

✉ hkxtals@HongKongCrystal.com

+852 - 3511 2420

🏠 <https://www.HongKongCrystal.com>



Unit C, 24/F, Shield Industrial Centre, 84 - 92 Chai Wan Kok Street, Tsuen Wan, ,New Territories, Hong Kong.



Specifications

GNSS

GNSS Reception Capability	GPS L1C/A, SBAS L1C/A, QZSS L1C/A, QZSS L1 SAIF, GLONASS L1OF, BeiDou B1, Galileo E1B/C		
GNSS Reception	32 channels		
GNSS Sensitivity	GPS	Tracking	-166 dBm
		Acquisition	-157 dBm
	GLONASS	Tracking	-166 dBm
		Acquisition	-151 dBm
BeiDou	Tracking	-159 dBm	
	Acquisition	-146 dBm	
Galileo	Tracking	-159 dBm	
	Acquisition	-142 dBm	
GNSS Antenna Connector	TNC		
GNSS Antenna Impedance	50 Ω		
GNSS Antenna Bias	3.3 V		

Lock Time

Power On to Lock (< 0.5 ppb)	< 5min. (TYP)
Holdover to Lock (< 0.5 ppb)	< 3min. (TYP)

Holdover

Time Accuracy to UTC (within 24-hour / $\pm 10^{\circ}\text{C}$ temperature variations)	$\pm 1.5 \mu\text{s}$ (TYP)
--	-----------------------------

Computer Interface

USB Version 2.0	Type-B Receptacle, Virtual COM Driver, 115200-8-N-1
Ethernet (Optional)	RJ-45, TCP/IP, 100 BASE-T

Protocol

NMEA 0183 Standard Ver 4.10
Proprietary ASCII command

Compliances

Frequency Accuracy & Holdover	ITU-T G.812
-------------------------------	-------------

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
ACTUAL PRODUCT MAY VARY DUE TO PRODUCT ENHANCEMENT.



+852 - 3511 2388

✉ hkxtals@HongKongCrystal.com

+852 - 3511 2420

🏠 <https://www.HongKongCrystal.com>



Unit C, 24/F, Shield Industrial Centre, 84 - 92 Chai Wan Kok Street, Tsuen Wan, ,New Territories, Hong Kong.



Specifications

1PPS Output	Condition	Min.	Typ.	Max.	Unit
Output voltage high	LVC MOS, IOH = -12mA	2.4			V
Output voltage low	LVC MOS, IOH = 12mA			0.7	V
Nominal Output Impedance			50		Ω
Programmable Duty		10		90	%
Rising/Falling Time	5pF load		0.7	1	ns
Accuracy @ Lock				± 10	ns
Stability @ Lock				± 4	ns
Accuracy @Holdover				$\pm 1.5\mu\text{s} / 24\text{H}$	ns

10MHz Output (LVC MOS)	Condition	Min.	Typ.	Max.	Unit
Output voltage high	LVC MOS, IOH = -12mA	2.4			V
Output voltage low	LVC MOS, IOH = 12mA			0.7	V
Nominal Output Impedance			50		Ω
Duty		45		55	%
Rising/Falling Time	5pF load		0.7	1	ns
Long Term Stability (24h average) @ Lock				$\pm 1 \times 10^{-12}$	
Short Term Stability (Allan deviation $\tau=1\text{sec.}$) @ Lock				5×10^{-11}	

Environment	Min.	Typ.	Max.	Unit
Operating temperature	-20		+70	$^{\circ}\text{C}$
Storage temperature	-40		+85	$^{\circ}\text{C}$
Operation humidity			+85	%R.H

Power	Min.	Typ.	Max.	Unit
Supply Voltage	4.75	5.0	5.25	VDC
Warm Up			1300	mA
Steady State @ 25 $^{\circ}\text{C}$			700	mA
Connector	2.5mm DC Power Socket with Lock			

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
ACTUAL PRODUCT MAY VARY DUE TO PRODUCT ENHANCEMENT.



+852 - 3511 2388

✉ hkxtals@HongKongCrystal.com

+852 - 3511 2420

🏠 <https://www.HongKongCrystal.com>




Unit C, 24/F, Shield Industrial Centre, 84 - 92 Chai Wan Kok Street, Tsuen Wan, ,New Territories, Hong Kong.



Specifications


Phase Noise at RF Output (at GNSS locked)

Offset Frequency	Phase Noise max
1Hz	-95 dBc/Hz
10Hz	-118 dBc/Hz
100Hz	-145 dBc/Hz
1KHz	-155 dBc/Hz
10KHz	-158 dBc/Hz
100KHz	-158 dBc/Hz
1MHz	-158 dBc/Hz

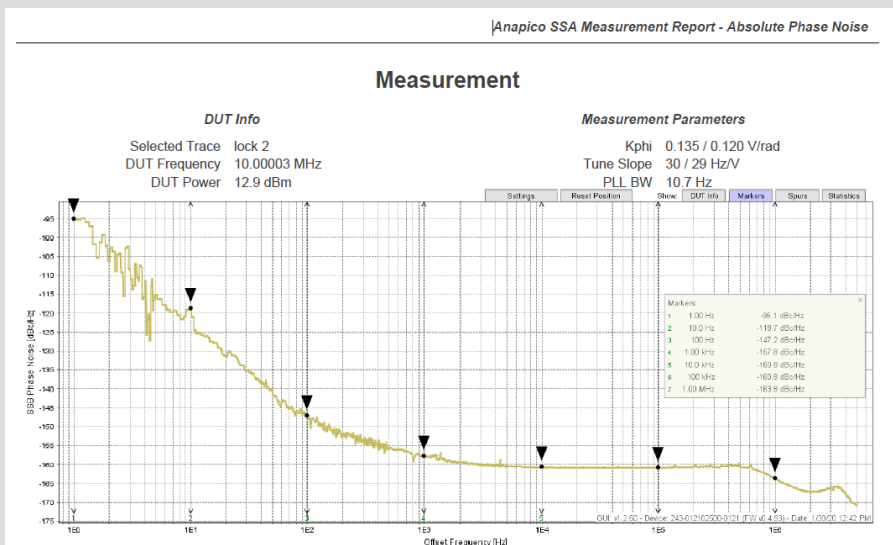

Short Term Stability

Tau (sec)	1
Allan Deviation (Sigma)	5×10^{-11}

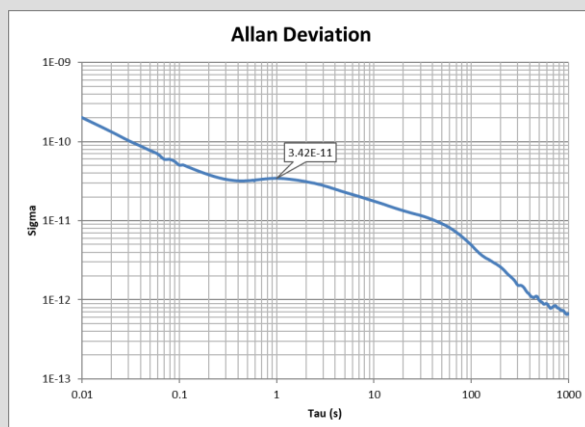

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
ACTUAL PRODUCT MAY VARY DUE TO PRODUCT ENHANCEMENT.



+852 - 3511 2388

✉ hkxtals@HongKongCrystal.com

+852 - 3511 2420


🏠 <https://www.HongKongCrystal.com>




Unit C, 24/F, Shield Industrial Centre, 84 - 92 Chai Wan Kok Street, Tsuen Wan, ,New Territories, Hong Kong.




Accessories

GNSS Antenna		Typ.	Unit
Bias Voltage		3.3	V
Gain		28	dBi
Cable Type		RG58	
Material		PVC	
Connector		TNC male	
Cable Length		10 Other lengths available upon request	meter
Dimensions		Antenna Diameter :	95 mm
		Mount Diameter :	105 mm
		Height :	175 mm

Optional Features

 Programmable Frequency Synthesizer Output		Min.	Typ.	Max.	Unit
Output Frequency		1		200	MHz
Duty		40	50	60	%
VOH		2.4		3.3	V
VOL				0.45	V
Nominal Output Impedance			50		Ω
Accuracy				50	ppb
Typical Phase Jitter on outputs (RMS)			0.5		ps

 Uninterruptible Batteries Backup			Unit
Batteries Backup Time		3	hour

Testing Condition

1. Connected USB, GNSS Antenna, 1PPS and 10MHz
2. Temperature at 25 °C
3. No programmable frequency option

The above Battery life test is used for reference information only, values not guaranteed.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
ACTUAL PRODUCT MAY VARY DUE TO PRODUCT ENHANCEMENT.



+852 - 3511 2388

✉ hkxtals@HongKongCrystal.com

+852 - 3511 2420


🏠 <https://www.HongKongCrystal.com>




Unit C, 24/F, Shield Industrial Centre, 84 - 92 Chai Wan Kok Street, Tsuen Wan, ,New Territories, Hong Kong.



Signal Connections

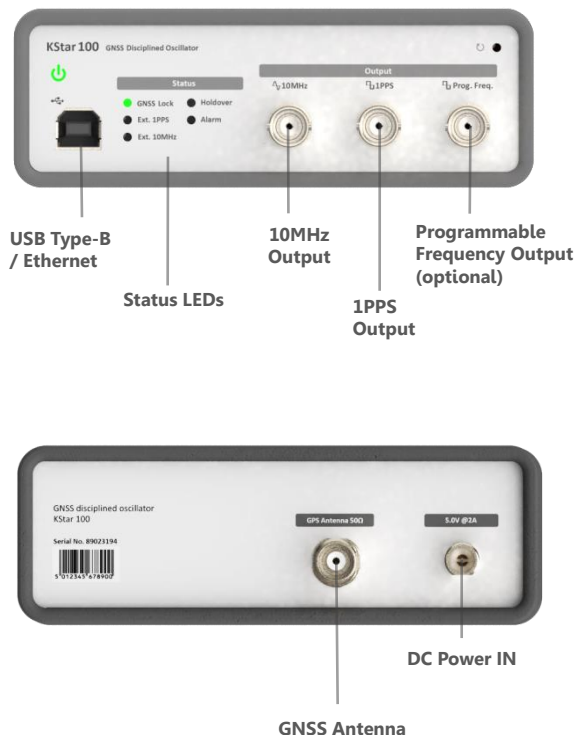

Dimension

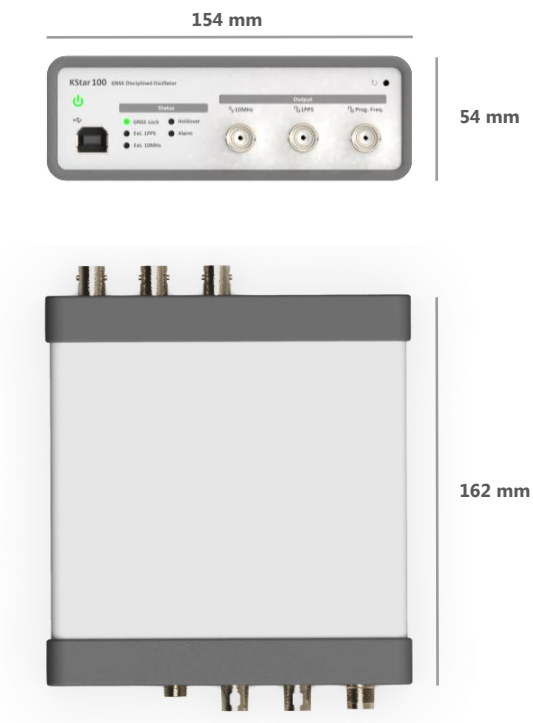

Standard Package

